

## KEM-734 Recording Contact Counter

The KEM-734 can be connected to a sensor that outputs an electrical pulse signal in order to count and record the pulse signal. Either a 1-day or a 7-day chart can be used with the KEM-734.



### APPLICATIONS

Connection to wind run-type speed sensors,  
connection to rain gauge sensors


### FEATURES

Easy to use and maintain

### SPECIFICATIONS

<b>Components</b>	Unit uses a solenoid and ratchet to drive the pen on a comma-shaped cam; count starts again from 0 when 100 pulses have been reached.
<b>Measurement range</b>	0 to 100 pulse count
<b>Power source</b>	3 V DC (two D-cell batteries), 100 mA
<b>Clock power</b>	One C-cell battery
<b>Standard components</b>	Recorder only
<b>Size/weight</b>	Approx. 327 × 141 × 240 mm, 4.0 kg

### Recording Contact Counter Dimensions

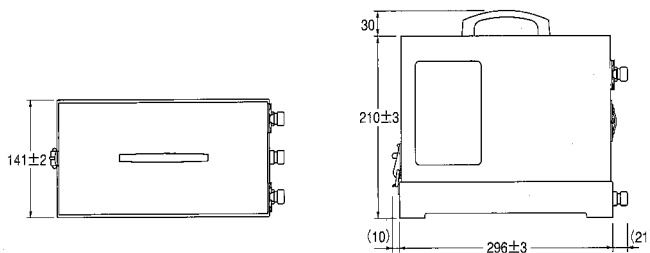

TOKYO

KOMATSU FACTORY CO.,LTD.

WEATHER INSTRUMENTS FABRICATION

1-12-13 Higashiyama Meguro-ku Tokyo 153-0043 Japan

TEL : 03-3719-7131

FAX : 03-3719-7134

e-mail : [info@komatsuins.co.jp](mailto:info@komatsuins.co.jp)